


1000 Series *Heavy Duty Rim Exit Device*

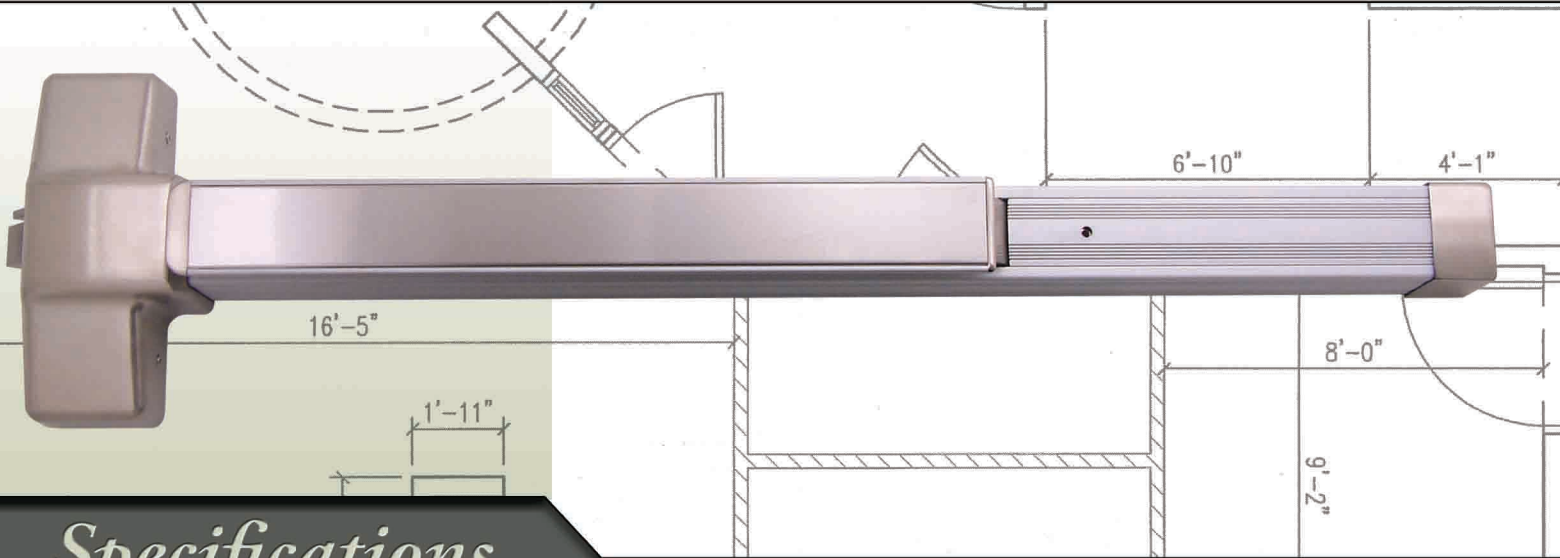

Specifications

ANSI : Meets & Exceeds ANSI A156.3 - Grade 1 Standards

UL Listings: UL Listed for Panic Exit Hardware

UL Listed for "A" Label 3 Hour Fire Doors

ADA : Meets ADA requirements ANSI A117.1 with Lever Trim

Handing : Non Handed - Completely Reversible

Construction : Heavy Duty Extruded Anodized Aluminum Channel & Steel Chassis

Finishes : US4 , US10B & US32D on Headcover, Pushbar & Endcap

Latchbolt : Deadlocking latchbolt with 5/8" projection

Strike : Roller Strike with 5/8" projection with 1/8" shim

Dogging : Hex Key Dogging Standard on Panic Exit Hardware

Cylinder Dogging : Cylinder Dogging Kits available for new or existing exit devices

Device Lengths : 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors

Min. Door Width : 33" & 42" devices can be cut down to fit on 2'-8" wide door

Center Case Dim. : 8" Height x 2 7/8" Wide x 2 13/16" Thick - 4 1/2" Min. stile required

Mechanism Case Dim. : 2 3/16" Height x 2 3/16" Wide


Projection : 3 3/8" Undogged - Pushbar Neutral & 2 13/16" Dogged - Pushbar Depressed

Fasteners : Wood, Machine & Self Tapping Machine Screws (F1000R includes thru bolts)

Trim & Accessories : Wide Variety of Exterior Trims, Shim Kits other accessories available

Alarmed Exits : Exit Alarm Kit ALK-1000 available for new or existing devices

Warranty : Limited Lifetime Warranty

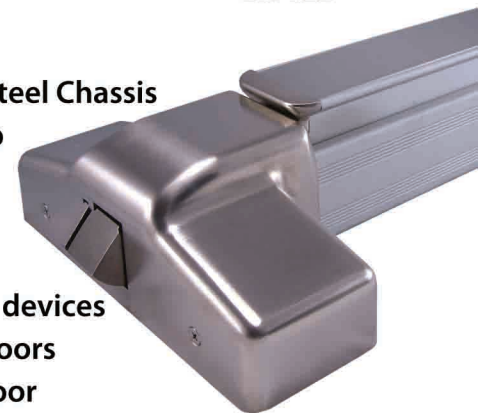

US32D



US4



US10B



211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net