


# K2 Series

## Cylindrical Knob Lock

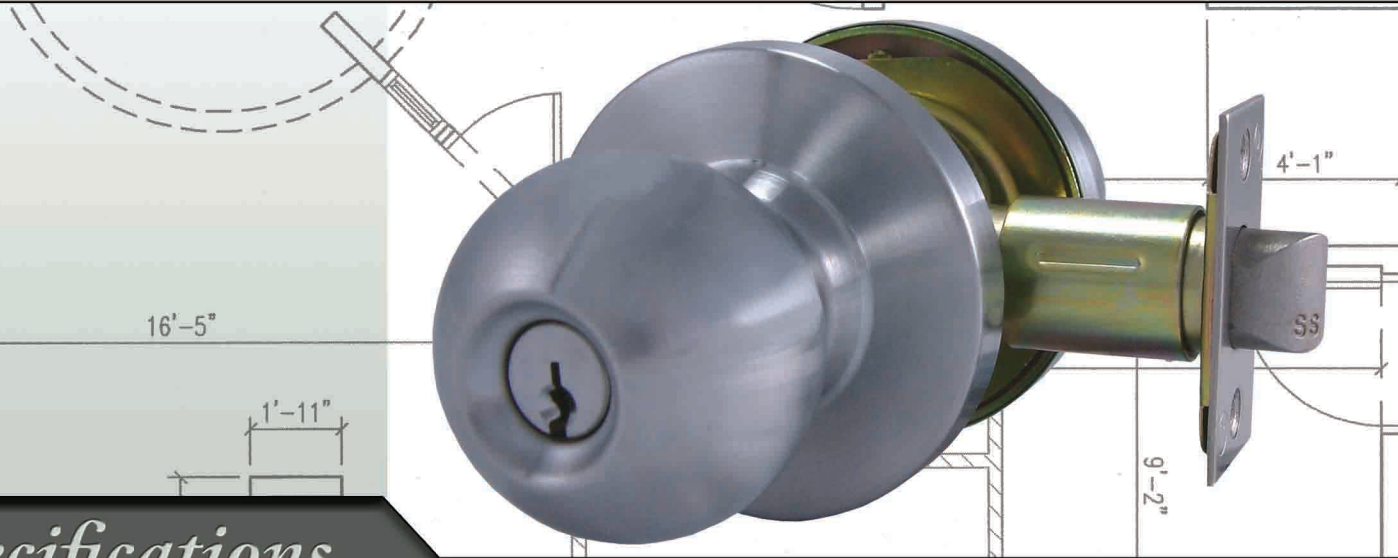

### Specifications

- ANSI :** Meets & Exceeds ANSI - A156.2, Series 4000, Grade 2 Standards
- UL Listings :** UL Listed for "A" Label 3 Hour Fire Doors
- ADA Compliance :** Meets ADA and ANSI A117.1 accessibility codes
- Cycle Testing :** Tested to over 2 Million Cycles
- Lock Chassis :** Steel, Zinc dichromated for Corrosion Resistance
- Trim :** Wrought Brass Knob & 3" wrought brass roses
- Handing :** Non-Handed - Completely reversible
- Backset & Latchface :** 2 3/4" backset std. with 1 1/8" x 2 1/4" latchface, 2 3/8" backset is available with 1" x 2 1/4" latchface both with self adjusting front for square or beveled edge doors
- Latchbolt :** Stainless Steel with 1/2" projection, Deadlocking on keyed functions
- Cylinder Options :** 6 Pin Solid Brass, C Keyway, 2 Silver Nickel Keys, Standard Cylinder plug faces match lock finish
- Strikes :** 4 7/8" ASA standard, 2 3/4" T strike & Full lip strike available
- Door Preparation :** ANSI A115.2 - 2 1/8" crossbore
- Door Thickness :** Factory Set for 1 3/4", can be adjusted to fit 1 3/8" to 2" thick doors
- Standard Trim Design :** Ball Knob
- Standard Finishes :** US3 PVD\*, US4, US10B, US26D, US26 PVD\* (PVD = Lifetime Finish)
- Fasteners :** Combination screws for wood or metal doors & frames
- Warranty :** Limited Lifetime Warranty

