


M Series

Heavy Duty Mortise Lock



Small Format IC
6 or 7 pin

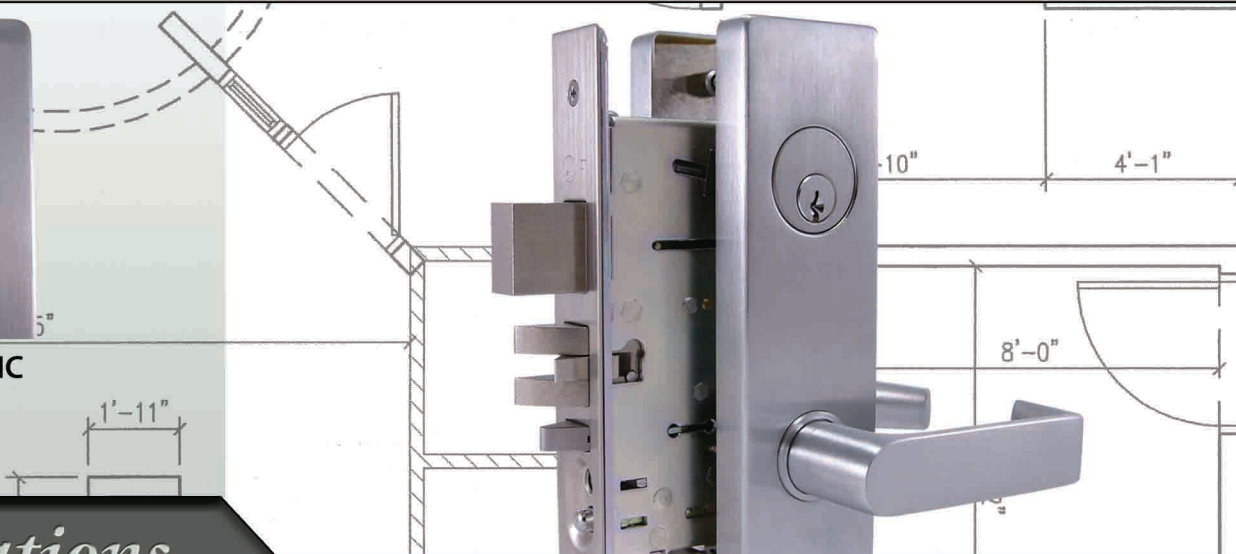

Specifications

- ANSI :** Meets & Exceeds ANSI - A156.13, Series 1000, Grade 1 Standards
- UL Listings :** UL Listed for "A" Label 3 Hour Fire Doors, Singles or Pairs
- ADA Compliance :** Meets ADA and ANSI A117.1 accessibility codes with lever trim
- Cycle Testing :** Tested to over 2 Million Cycles
- Lock Case :** Heavy Gauge Plated Steel, Zinc dichromated for Corrosion Resistance
- Levers :** 5" Full Length Forged Brass or Stainless Steel
- Trim :** 2 1/4" x 8 1/8" Cast Escutcheon or 3" Wrought Brass Ros
- Lever Return:** Independent lever return springs to prevent lever sag
- Trim Attachment** Thru bolted Lever or Knob trim for increased security
- Handing :** Handed - Easily Rehanded in the field
- Backset :** 2 3/4" backset
- Armored Front** Wrought Stainless Steel or Brass 1 1/4" x 8"
- Latchbolt :** Stainless Steel 3 Piece Anti Friction with 3/4" projection
- Deadlocking :** Non handed Stainless Steel Deadlatch
- Deadbolt :** 1" Throw, Stainless Steel with a Anti-Saw Pins
- Cylinder Options :** 6 Pin Brass, C Kwy, with 2 Keys std, Prepared for Small format IC core (less core)
- Optional Keyways :** 11 popular competitor keyways available with replacement cylinders
- Strikes :** 4 7/8" x 1 1/4" ASA
- Door Thickness :** 1 3/4" Standard, other thicknesses available when specified
- Lever Designs :** Flat (standard, shown above), Curved, Half Curved, Tubular, Ball Knob
- Finishes :** US3, US4, US10, US10B, US15, US26, US26D (stocked with Flat lever), US32, US32D
- Fasteners :** Combination screws for wood or metal doors & frames
- Warranty:** Limited Lifetime Warranty



Half Curved Lever Sectional Trim